

> TAM GEÇİŞLİ KÜRESEL VANA

FULL PORT BALL VALVE

BAV-0202




CERTIFICATIONS



Basınç Sınıfı : PN16
Gövde : Sfero Döküm
Kapak : Pik Döküm
Küre : Paslanmaz çelik
Conta : PTFE
3 parçalı
Flanşlı

Pressure Rating : PN16
Body : Ductile Iron
Bonnet : Cast Iron
Ball : Stainless steel
Seat : PTFE
3 pcs
Flanged

PRODUCT	SIZE
BAV-0202X065	DN 65
BAV-0202X080	DN 80
BAV-0202X100	DN 100
BAV-0202X125	DN 125
BAV-0202X150	DN 150
BAV-0202X200	DN 200
BAV-0202X250	DN 250

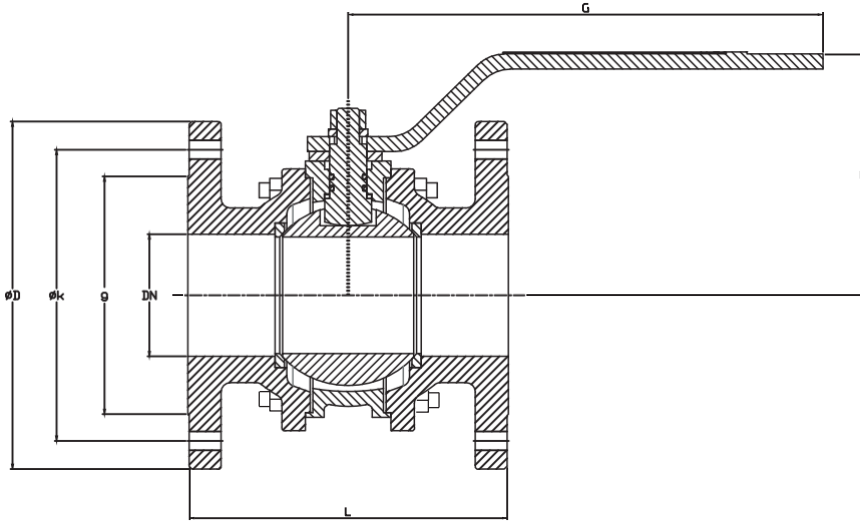

MALZEME / MATERIALS

Gövde / Body : Sfero döküm / Ductile iron (GGG40.3)
Kapak / Bonnet : Pik döküm / Cast iron (GG25)
Küre / Ball : Paslanmaz çelik / Stainless steel
Sit / Seat : PTFE
Mil / Stem : Paslanmaz çelik / Stainless steel
O-Ring : EPDM
Kol / Hand lever : Plastik kaplı karbon çelik / Carbon steel
Saplama / Rod : Karbon çelik / Carbon steel
Somun / Nut : Karbon çelik / Carbon steel

GENEL ÖZELLİKLER / GENERAL PROPERTIES

Standart No : TS3148
Basınç Sınıfı / Pressure Rating : PN16
Maksimum Çalışma Sıcaklığı / Maximum Working Temp. : 120 °C
Maksimum Çalışma Basıncı (Sürekli) / Maximum Working Pressure (Continuous) : 11 bar

DN	L	g	ØK	ØD	H	G
65	170	118	145	185	140	260
80	180	132	160	200	155	335
100	190	156	180	220	170	335
125	325	184	210	250	190	335
150	350	211	240	285	245	700
200	400	266	295	340	280	700