

UEJ-0904

Sabit Flanşlı Kompansatör (Laynerli) Rigid Flanged Expansion Joint (Liner)



SERTİFİKA / CERTIFICATE



TEKNİK ÖZELLİKLER / TECHNICAL SPECIFICATIONS

| | |
|-------------------------|---------------------------------------|
| Bağlantı Tipi | : Sabit flanşlı |
| Basınc Sınıfı | : 16 bar / 2,5 bar...63 bar Opsiyonel |
| Sıcaklık | : 80 °C / 427 °C |
| Genleşme Miktarı | : 30 mm (-20+10) / 60 mm (-40+20) |
| Standart No. | : TS 10880 |


| | |
|------------------------|--------------------------------------|
| Connection Type | : Rigid flanged |
| Pressure Rating | : 16 bar / 2,5 bar...63 bar Optional |
| Flange | : 80 °C / 427 °C |
| Expansion | : 30 mm (-20+10) / 60 mm (-40+20) |
| Standard No. | : TS 10880 |

| Ürün / Product | Ölçü / Size |
|----------------|-------------|
| UEJ-0904X025 | DN25 |
| UEJ-0904X032 | DN32 |
| UEJ-0904X040 | DN40 |
| UEJ-0904X050 | DN50 |
| UEJ-0904X065 | DN65 |
| UEJ-0904X080 | DN80 |
| UEJ-0904X100 | DN100 |
| UEJ-0904X125 | DN125 |
| UEJ-0904X150 | DN150 |
| UEJ-0904X200 | DN200 |
| UEJ-0904X250 | DN250 |
| UEJ-0904X300 | DN300 |

MALZEME / MATERIAL

Körük / Bellows : Paslanmaz Çelik / Stainless Steel
Layner / Sleeve : Paslanmaz Çelik / Stainless Steel
Flanş / Flange : Karbon Çelik / Carbon Steel

TEKNİK RESİM / TECHNICAL DRAWING

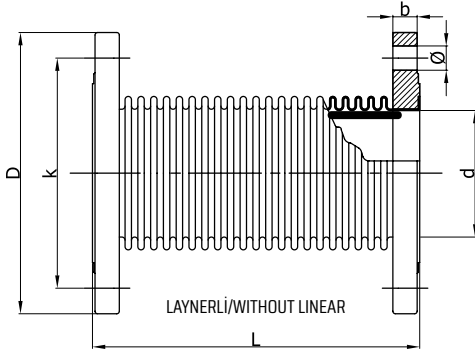

ÖLÇÜ TABLOSU / DIMENSIONS

| DN | Inch | L [mm] | | ØD [mm] | Ød [mm] | Øk [mm] | b [mm] | n [mm] | ØA [mm] | Körük Efektif Alanı Bellows Effective Area [cm ²] |
|-----|--------|--------|-----|---------|---------|---------|--------|--------|---------|--|
| | | 30 | 60 | | | | | | | |
| 25 | 1" | 110 | - | 115 | 42,4 | 85 | 16 | 4 | 14 | 17,87 |
| 32 | 1 1/4" | 110 | - | 140 | 42,4 | 100 | 18 | 4 | 18 | 17,87 |
| 40 | 1 1/2" | 120 | - | 150 | 48,3 | 110 | 18 | 4 | 18 | 23,25 |
| 50 | 2" | 120 | 180 | 165 | 60,3 | 125 | 20 | 4 | 18 | 37,02 |
| 65 | 2 1/2" | 120 | 180 | 185 | 76,1 | 145 | 20 | 4 | 18 | 57,49 |
| 80 | 3" | 120 | 180 | 200 | 88,9 | 160 | 20 | 8 | 18 | 78,47 |
| 100 | 4" | 120 | 185 | 220 | 114,3 | 180 | 22 | 8 | 18 | 126,98 |
| 125 | 5" | 125 | 190 | 250 | 139,7 | 210 | 22 | 8 | 18 | 185,91 |
| 150 | 6" | 130 | 200 | 285 | 168,3 | 240 | 24 | 8 | 22 | 266,34 |
| 200 | 8" | 150 | 230 | 340 | 219,1 | 295 | 26 | 12 | 22 | 441,34 |
| 250 | 10" | 165 | 245 | 405 | 273 | 355 | 29 | 12 | 26 | 678,87 |
| 300 | 12" | 165 | 245 | 460 | 323,9 | 410 | 32 | 12 | 26 | 950,88 |